

## **USER'S MANUAL**

### **Waterproof LED Par 54x3W RGBW Lighting**



#### **1. Maintenance**

- 1. Please keep the light in dryness and avoiding use in wet place.**
- 2. Using intermittently can be extended the life.**
- 3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.**
- 4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.**

#### **2. Statement**

**The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual. Please forgive that we will not be notice for technical change**

#### **3. Attention Item**

- 1. For guarantee the life of product, please do not put it on the wet place and not use it the place over 40 degree.**
- 2. Please don't lay the product on the un-fixable or shakable place.**
- 3. Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.**
- 4. Power supply should not be changed over +&-10% while the light is using, it will be decreased the life of lamp if the power is too high, but it will be influenced the luminosity if the power is too low.**
- 5. After power off, if it is need used again, please cool down over 20 minuter.**
- 6. Please look round the manual for ensure the product can be used normally.**

#### 4. Display Control Instruction

Welcome to use our light. The light uses energy-saving LED, long Product life, shockproof, dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects, easy to operate, suitable for all types of entertainment decoration, architectural lighting industry.


A: Function

B: Up

C: Down

D: Enter

E: LED Display

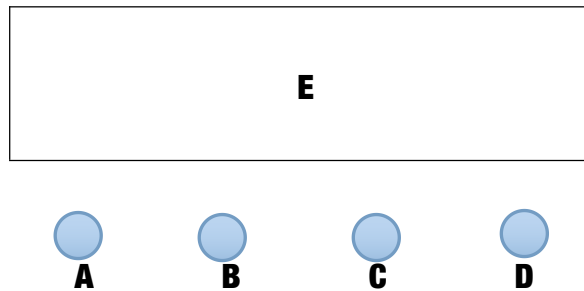

**Instructions:** Press the function key A cycled out the eight different function effects, digital tube first two digits on behalf of which the current function (see menu). The last two digits represent the functions in which the address code or speed parameters. Press the B or C key to modify the parameter values. Press the D key to confirm.

\*Power Supply: AC90--275V, 50--60HZ

\*Power consumption: 162W

\*Fixing lamp: LED 54×3W RGBW

\*DMX-Control-channels: 8/4 DMX Channels

\*Shuttle: Flash rate: 0--10HZ

\*Dimmer: 0-100% mechanic dimmer

\*Long Lifespan LEDs (more than 60,000 hours)

# SHEHDS

## 5. Display panel

No	Submenu	Function
<i>R001-R512</i>	<i>1-512</i>	<b>10 channel DMX Address</b>
<i>d001-d512</i>	<i>1-512</i>	<b>6 channel DMX Address</b>
<i>r000-r255</i>	<i>0-255</i>	<b>Red Dimmer</b>
<i>G000-G255</i>	<i>0-255</i>	<b>Green Dimmer</b>
<i>b000-b255</i>	<i>0-255</i>	<b>Blue Dimmer</b>
<i>w000-w255</i>	<i>0-255</i>	<b>White Dimmer</b>
<i>F001-F255</i>	<i>0-255</i>	<b>Flash /Strobe</b>
<i>cc00-+cc15</i>	<i>0-15</i>	<b>Color jump change</b>
<i>dE00-dE15</i>	<i>0-15</i>	<b>Color Gradual change</b>
<i>cP00-cP15</i>	<i>0-15</i>	<b>Color pulse change</b>
<i>cL01-cL15</i>	<i>0-15</i>	<b>Color Choice</b>
<i>Sound</i>		<b>Sound Control mode</b>

SHEHDS

DMX Channel Summary (ADD 1-R5 12)		
Channel	Value	Function
CH1	0-255	Total Dimmer
CH2	0-255	Red Dimmer
CH3	0-255	Green Dimmer
CH4	0-255	Blue Dimmer
CH5	0-255	White Dimmer
CH6	0-255	Strobe
CH7	50-100	Quick manual color (Control by CH8)
	101-150	Color Jump change Effect
	151-200	Color Gradual change Effect
	201-250	Color Pulse change Effect
	251-255	Sound control mode
CH8	0-255	Function Speed Adjustment – CH7

DMX Channel Summary(ADD 1-R5 12 )		
Channel	Value	Function
CH1	0-255	Red Dimmer
CH2	0-255	Green Dimmer
CH3	0-255	Blue Dimmer
CH4	0-255	White Dimmer

SHEHDS