

## USER'S MANUAL

### Mini LED Spider 8×10W RGBW



#### Maintenance

1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

#### Statement

The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual. Please forgive that we will not be notice for technical change

#### Attention Item

1. For guarantee the life of product, please do not put it on the wet place and not use it the place over 40 degree.
2. Please don't lay the product on the un-fixable or shakable place.
3. Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.
4. Power supply should not be changed over +&-10% while the light is using, it will be decreased the life of lamp if the power is too high, but it will be influenced the luminosity if the power is too low.

5.After power off,if it is need used again,please cool down over 20 minuter.

6.Please look round the manual for ensure the product can be used normally.

### DMX Channel Summary-7 Channels Mode

Channel	Value	Function
1.	0-255	Y1 Motor running
2.	0-255	Y2 Motor running
3.	0-255	Total dimmer, linear dimming-Dark to Bright
4.	0-255	Strobe,Slow to Fast
5.	0-234 235-255	Automatic function selection Sound control
6.	0-255	AUTO Mode Speed adjust
7.	241-255	Rest

### DMX Channel Summary-15 Channels Mode

Channel	Value	Function
1.	0-255	Y1 Motor running
2.	0-255	Y2 Motor running
3.	0-255	Total dimmer, linear dimming-Dark to Bright
4.	0-255	Strobe,Slow to Fast
5.	0-255	Red 1 overall dimming
6.	0-255	Green 1 overall dimming
7.	0-255	Blue 1 overall dimming
8.	0-7 8-231 232-255	White 1 overall dimming
9.	0-255	Red 2 overall dimming
10.	0-255	Green 2 overall dimming
11.	0-255	Blue 2 overall dimming
12.	0-255	White 2 overall dimming
13.	0-234 235-255	Automatic function selection Sound control
14.	0-255	AUTO Mode Speed adjust
15.	0-255	

## Display Control Instruction

<i>Addr</i>	<i>ADD 1-AS 12</i>	512 Address Settings
<i>chnd</i>	<i>7ch</i>	7 Channel settings
	<i>15ch</i>	15 Channel settings
<i>SLnd</i>	<i>nASt</i>	Host self-propelled mode
	<i>SoUn</i>	Host voice mode
	<i>SLAU</i>	Console mode

<i>Shnd</i>	<i>ShD 1-Sh24</i>	Effect 0 (recommended)
	<i>SPYd</i>	<i>SPO 1-SPO8</i>

<i>SoUn</i>	<i>on off</i>	Sound control mode
<i>SoEn</i>	<i>0-99</i>	Sound sensitivity regulatory

<i>tEST</i>	<i>YES</i>	Self checking
<i>d ISP</i>	<i>no-YES</i>	Display flip
<i>LEd</i>	<i>off</i>	After 5 seconds off screen
	<i>on</i>	Always on screen
<i>t IL 1</i>	<i>no</i>	Y1 motor is transferred
	<i>YES</i>	Y1 motor reversal


<i>t IL 2</i>	<i>no</i>	Y2 motor is transferred
	<i>YES</i>	Y2 motor reversal
<i>dEft</i>	<i>no-YES</i>	w

<i>d ISP</i>	<i>no</i>	Reverse Display
	<i>YES</i>	Display forward

<i>rEST</i>	<i>YES</i>	System Reset
-------------	------------	--------------

## Display Control Instruction

Welcome to use our light. The light uses energy-saving LED, long Product life, shockproof, dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects, easy to operate, suitable for all types of entertainment decoration, architectural lighting industry.

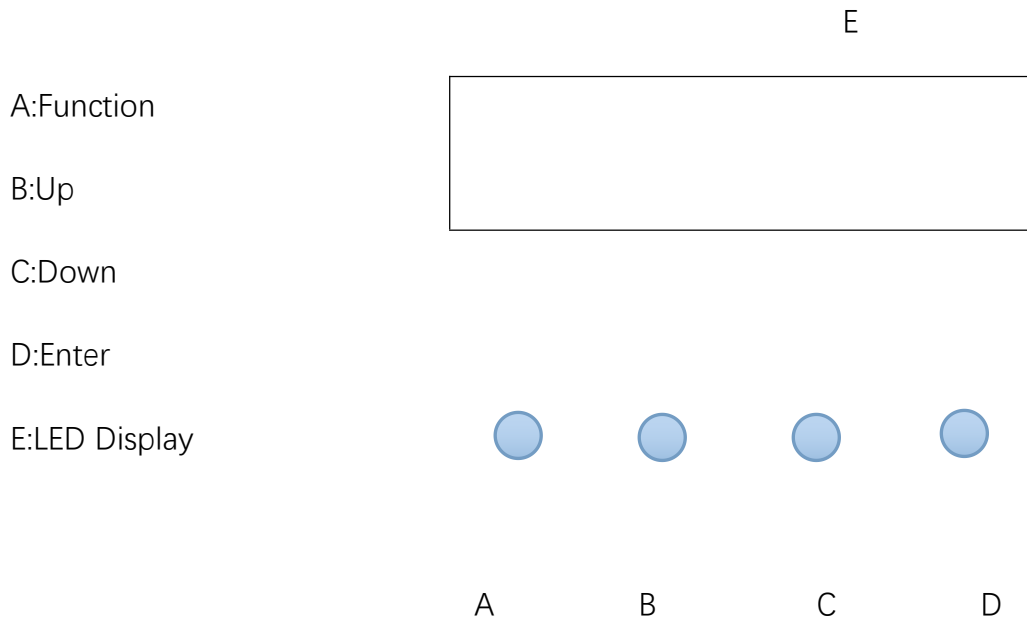

Instructions: Press the function key A cycled out the eight different function effects, digital tube first two digits on behalf of which the current function (see menu). The last two digits represent the functions in which the address code or speed parameters. Press the B or C key to modify the parameter values. Press the D key to confirm.

### Product Introduction

Power consumption: 48W

Fixing lamp: LED 8×6W RGBW

DMX-Control-channels: 7/15 DMX Channels

Shuttle: Flash rate: 0--10HZ

Power Supply: AC90--275V, 50--60HZ

Dimmer: 0-100% mechanic dimmer

Long Lifespan LEDs (more than 60,000 hours)