

USER'S MANUAL

4eyes 400W LED COB Blinder



Maintenance

1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

Statement

The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual. Please forgive that we will not be notice for technical change

Attention Item

1. For guarantee the life of product, please do not put it on the wet place and not use it the place over 40 degree.
2. Please don't lay the product on the un-fixable or shakable place.
3. Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.
4. Power supply should not be changed over +&-10% while the light is using, it will be decreased the life of lamp if the power is too high, but it will be influenced the luminosity if the power is too low.

5.After power off,if it is need used again,please cool down over 20 minuter.

6.Please look round the manual for ensure the product can be used normally.

DMX Channel Summary-1 Channels Mode d001

Channel	Value	Function
CH1	1# dimming	1# COB dimming, from dark to bright
CH2	2# dimming	2# COB dimming, from dark to bright
CH3	3# dimming	3# COB dimming, from dark to bright
CH4	4# dimming	4# COB dimming, from dark to bright

DMX Channel Summary-8 Channels Mode A001

Channel	Value	Function
1	0-255	1-4# COB total dimming, from dark to bright
2	0-255	1# COB dimming, from dark to bright
3	0-255	2# COB dimming, from dark to bright
4	0-255	3# COB dimming, from dark to bright
5	0-255	4# COB dimming, from dark to bright
6	0-255	1-4# COB total strobe, 005-255 from slow to fast
7	0-255	000-010: CH1-CH6 control.
		011-022: Light selection, controlled by CH8;
		023-034: Gradient effect 1;
		035-046: Gradient effect 2;
		047-058: Gradient effect 3;
		059-070: Gradient effect 4;
		071-082: Gradient effect 5;
		083-094: Gradient effect 6;
		095-106: Gradient effect 7;
		107-118: Gradient effect 8;
		119-130: Gradual effects 1-8 cycles;
		131-142: Transition Effect 1;
		143-154: Transition effect 2;
		155-166: Transition effect 3;
		167-178: Transition effect 4;
179-190: Transition effect 5;		
191-202: Transition effect 6;		
203-214: Transition effect 7;		


		215-226: Transition effect 8;
		227-238: Transition effects 1-8 cycles;
		239-250: pulse effect;
		251-255: Voice control effect;
8	0-255	Functional speed, from slow to fast

Display Control Instruction

Display	Value	Function
d001	001- 512	DMX512 address code set to 4-channel mode
A001	001- 512	DMX512 address code set -8 channel mode
S-SL	SL/FA	DMX dimming speed setting SL: slow dimming; FA: fast dimming
d-Ho	Ho/oF	DMX signal loss processing mode setting: Ho: Keeping the last DMX signal status; oF: Turn off all LEDs
r255	000 - 255	1# COB dimming, from dark to bright
G255	000 - 255	2# COB dimming, from dark to bright
b255	000 - 255	3# COB dimming, from dark to bright
u255	000 - 255	4# COB dimming, from dark to bright
F255	000 - 255	Above 5 strobe, speed from slow to fast
1J15	00 - 15	Jump effect setting: UP button to select 1#-9# hopping effect DOWN key sets the jump speed.
1d15	00 - 15	Gradient effect settings: UP button to select 1 # -9 # gradient effect DOWN key to set the gradation speed.
CP15	00 - 15	Pulse, from slow to fast.
SU15	00 - 15	Voice control jumps, high sensitivity from low to high.
t 30	0-99	The current temperature display (optional) is displayed when not in use: t---

Display Control Instruction

Welcome to use our light. The light uses energy-saving LED, long Product life, shockproof, dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects, easy to operate, suitable for all types of entertainment decoration, architectural lighting industry.

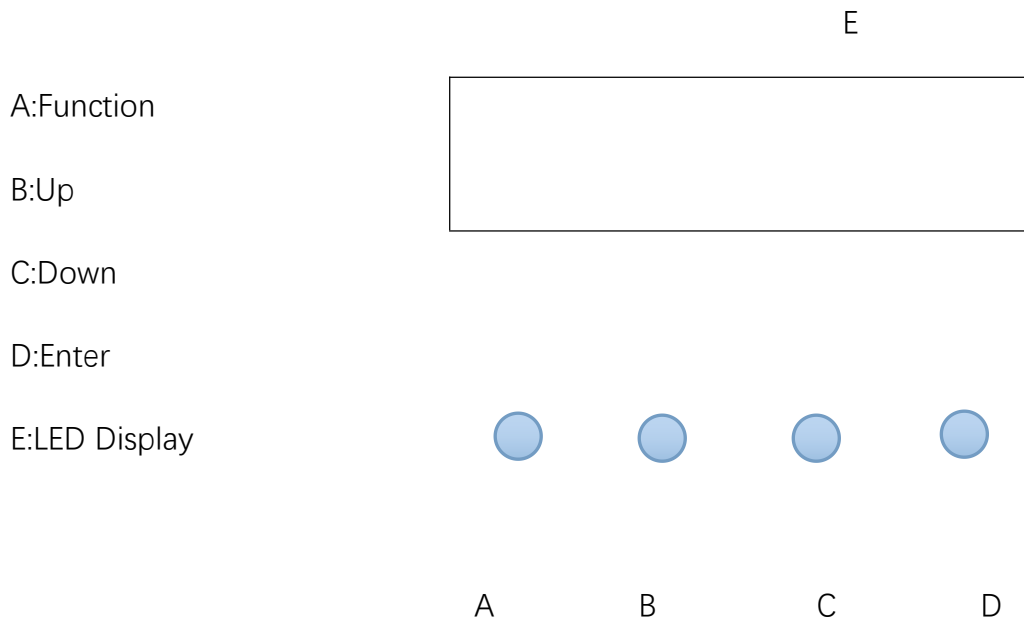

Instructions: Press the function key A cycled out the eight different function effects, digital tube first two digits on behalf of which the current function (see menu). The last two digits represent the functions in which the address code or speed parameters. Press the B or C key to modify the parameter values. Press the D key to confirm.

Product Introduction

- * Power Supply: AC90--275V, 50--60HZ
- * Power consumption: 400W
- * Fixing lamp: LED 4×100W warm white
- * DMX-Control-channels: 4/8 DMX Channels
- * Beam angel: 60°-75°
- * Shuttle: Flash rate: 0--10HZ
- * Dimmer: 0-100% mechanic dimmer
- * Long Lifespan LEDs (more than 60,000 hours)