

USER'S MANUAL

LED 120W Multifunctional Bar Lighting

.Maintenance



1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

.Statement


The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual. Please forgive that we will not be notice for technical change

.Attention Item

- 1.For guarantee the life of product,please do not put it on the wet place and not use it the place over 40 degree.
- 2.Please don't lay the product on the un-fixable or shakable place.
- 3.Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.
- 4.Power supply should not be changed over +&-10% while the light is using,it will be decreased the life of lamp if the power is too high,but it will be influenced the luminosity if the power is too low.
- 5.After power off,if it is need used again,please cool down over 20 minuter.
- 6.Please look round the manual for ensure the product can be used normally.

.Display Control Instruction

Welcome to use our light.The light uses energy-saving LED,long Product life,shockproof,dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects,easy to operate, suitable for all types of entertainment decoration,architectural lighting industry.

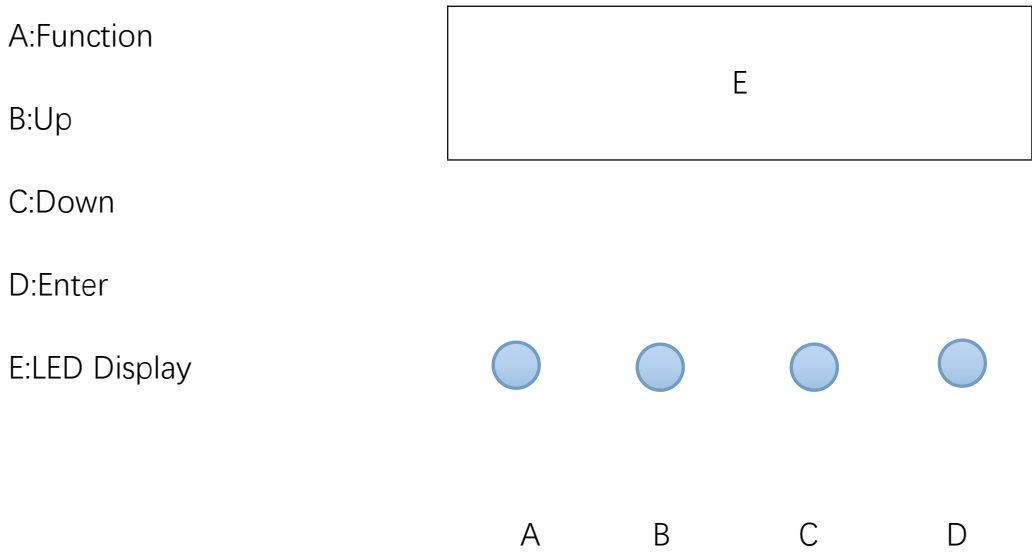

Instructions:Press the function key A cycled out the eight different function effects,digital tube first two digits on behalf of which the current function(see menu).The last two digits represent the functions in which the address code or speed parameters.Press the B or C key to modify the parameter values.Press the D key to confirm.

.Product Introduction

Control protocols: Art-Net, Kling-Net&DMX

Electronics in full digital control with front panel and LED display

Automatic self-test function even in the absence of a console

Control output: RJ45 connector

Data Connection: two Ethernet connectors (RJ45) for data source and secondary driver link

Universes: 4 universes

Channels for universe: 480

Power supply: AC 90-275V, 50/60Hz(Meanwell Brand)

Maximum consumption: 7.5W

Steel body

Internal Protection: IP20

Weight: 2.7 kg

Dimensions (WxHxD): 1005x45x39 mm

.DMX Channel Summary

8CH Channels Mode			
Channel	Function	Value	Function
CH1	Dimming	0-255	Total Dimming
CH2	Strobe	0-255	Linear Strobe
CH3	Red	0-255	Red
CH4	Green	0-255	Green
CH5	Blue	0-255	Blue
CH6	Auto 1	0-255	Auto Programs 1-15
CH7	Auto 2	0-255	Auto Programs 16-30
CH8	Auto speed	0-255	Programs Speed

480CH Channels Mode			
Channel	Function	Value	Function
CH1	Red LED	0-255	Full LED Red
CH2	Green LED	0-255	Full LED Green
CH3	Blue LED	0-255	Full LED Blue
CH4-CH480	Color point control	0-255	RGB Point control