

LEV-10235-G
3.5" LED GIMBAL RECESSED DOWNLIGHT

Recessed Downlight | Interior and Exterior | Dry and Damp Location



Date	
Project	
Type	
Location	

ORDERING INFORMATION

Sample Number: LEV-10235-G-12W-30-2-90-BK


Product #	Wattage	CCT	Beam Angle	CRI	Trim Finish
LEV-10235-G	12W	27	1 15°	90	BK Black
		30	2 24°	97	WH White
		35	3 38°		SN Satin Nickel
		40			
		50			




SPECIFICATIONS

Environment	Interior and exterior. For dry and damp locations.
Material	Die-cast aluminum
Trim Finish	Black / White / Satin Nickel
Color Temperature	2700K / 3000K / 3500K / 4000K / 5000K
Beam Angle	15° / 24° / 38°
Input Voltage	120V, 60Hz
Wattage	12W
Lumen	1200Lm
CRI	90 / 97
IP Rating	54
Mounting	Recessed into non-insulated type frame with spring clips
Warranty	5 years limited warranty Estimated 50,000 hours useful life of LED


DIMENSIONS

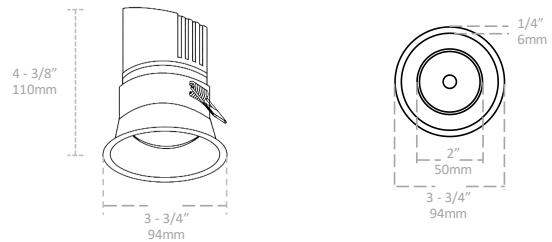


CUT HOLE SIZE



FINISH



COLOR TEMPERATURE



BEAM ANGLE

