



WINSAT TECHNOLOGY LIMITED

Add: Room 1601, Building F Galaxy World, No.1 Ya Bao Road, Bantian Street,
Longgang District, Shenzhen, Guangdong, China
Tel.:0755-83563921 **Fax:**0755-83563931

GT MEDIA V8 Finder BT03 (Digital Satellite Finder)

ID	<p>V8 FINDER BT03 Usage Diagram</p>  <p>You can search for "V8 FINDER" in the APP Store and google play to download the app.</p>												
Highlight	<ol style="list-style-type: none"> 1. DVB Finder DVB-S2 Multi standard demodulation & decoding 2. BT connection for Android APP and Apple APP 3. Support full satellite selection. 4. Technical support website: www.freesat.cn <p>Note: We reserve the right to change the design and OEM/ODM supported</p>												
Hardware	<table border="1"> <tr> <td>Flash Memory</td> <td>32MB Serial Flash</td> </tr> <tr> <td>DDR2 Memory</td> <td>512M Bits</td> </tr> <tr> <td>LED Indicator</td> <td>Blue (Flashing: Not connected, Normally on: connected)</td> </tr> <tr> <td>Rear Panel</td> <td>LNB IN (Frequency Range 950MHz to 2150MHz DVB-S/S2) micro USB : ≥DC 5V 1.5A</td> </tr> </table>	Flash Memory	32MB Serial Flash	DDR2 Memory	512M Bits	LED Indicator	Blue (Flashing: Not connected, Normally on: connected)	Rear Panel	LNB IN (Frequency Range 950MHz to 2150MHz DVB-S/S2) micro USB : ≥DC 5V 1.5A				
Flash Memory	32MB Serial Flash												
DDR2 Memory	512M Bits												
LED Indicator	Blue (Flashing: Not connected, Normally on: connected)												
Rear Panel	LNB IN (Frequency Range 950MHz to 2150MHz DVB-S/S2) micro USB : ≥DC 5V 1.5A												
System introduction	<p>DVB-S2</p> <p>DVB-S/S2 system standard: ETS 302 307 (SCPC and MCPC receivable from C/Ku band satellite)</p> <p>DiSEqC1.0 support, 13/18V DC @ 350mA MAX, Overload Protection, 0/22K</p> <p>Multi standard demodulation & decoding</p> <p>DVB-S2 CCM, QPSK+1/4, 1/3, 2/5, 1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10</p> <p>8PSK+3/5, 2/3, 3/4, 5/6, 8/9, 9/10 16APSK+2/3, 3/4, 4/5, 5/6, 8/9, 9/10</p> <p>32APSK+3/4, 4/5, 5/6, 8/9, 9/10</p> <p>Legacy DVB-S QPSK+1/2, 2/3, 3/4, 5/6, 7/8</p> <p>VCM mode supported</p> <p>Dummy frame insertion supported</p> <p>Automatic standard recognition</p> <p>Support 1 to 60Mbaud symbol rates</p> <p>Fast channel blind scan for RF frequency & symbol rate acquisition</p> <p>High performance equalizer, canceling echo introduced by front end</p> <p>Simple AGC – Tuner interface</p> <p>Build in DC cancellers to remove DC component</p> <p>IQ imbalance compensator</p> <p>Automatic roll-off factor (0.35/0.25/0.20) detection</p> <p>Automatic spectrum inversion</p> <p>Signal quality and statistic, allowing improved monitoring and debug</p> <p>DiSEqCTM v2.2 modulation output for full control of LNB and satellite antenna</p>												
Packing	<table border="1"> <tr> <td>Product Dimension</td> <td>42*95*15 MM</td> </tr> <tr> <td>Packaged Size</td> <td>118*80*35MM</td> </tr> <tr> <td>Carton Size</td> <td>370*366*282MM (90pcs/ctn)</td> </tr> <tr> <td>Unit Weight</td> <td>0.12 Kg with gift box</td> </tr> <tr> <td>Carton Qty&Weight</td> <td>90 pcs/Carton, 9.5 kgs</td> </tr> <tr> <td>Accessories</td> <td>DVB Finder BOX*1, MINI USB cable*1</td> </tr> </table>	Product Dimension	42*95*15 MM	Packaged Size	118*80*35MM	Carton Size	370*366*282MM (90pcs/ctn)	Unit Weight	0.12 Kg with gift box	Carton Qty&Weight	90 pcs/Carton, 9.5 kgs	Accessories	DVB Finder BOX*1, MINI USB cable*1
Product Dimension	42*95*15 MM												
Packaged Size	118*80*35MM												
Carton Size	370*366*282MM (90pcs/ctn)												
Unit Weight	0.12 Kg with gift box												
Carton Qty&Weight	90 pcs/Carton, 9.5 kgs												
Accessories	DVB Finder BOX*1, MINI USB cable*1												
Physicals	<table border="1"> <tr> <td>Temperature</td> <td>Operation 0~+45°C; Storage -10~+60°C</td> </tr> <tr> <td>Humidity</td> <td>20~90%, non-condensed</td> </tr> </table>	Temperature	Operation 0~+45°C; Storage -10~+60°C	Humidity	20~90%, non-condensed								
Temperature	Operation 0~+45°C; Storage -10~+60°C												
Humidity	20~90%, non-condensed												



Channels 7

- 1 CCTV 1
- 2 CCTV 2
- 3 CCTV 7
- 4 CCTV 10
- 5 CCTV 11
- 6 CCTV 12
- 7 CCTV 15

Satellite 76.5E Apstar 7
Transponder 3920/H/28340

Satellite

NSS 9/Yamal 300K	177.0 W
AMC 8/18	139.0 W
AMC 10	135.0 W
Galaxy 15	133.0 W
EchoStar 105/SES 11	132.5 W
AMC 11	131.0 W
Ciel 2/SES 15	129.0 W
Galaxy 13/Horizons 1	127.0 W
AMC 21/Galaxy 14	125.0 W
Galaxy 18	123.0 W
EchoStar 9/Galaxy 23 (121.0W)	121.0 W
Anik F3/DirecTV 7S/ EchoStar 14	119.0 W

Satellite 76.5E Apstar 7
Transponder 3920/H/28340

LNB Config

LNB Frequency 5150

22K Off

Diseqc port Off

Antenna 5150
Satellite 76.5E Apstar 7
Transponder 3920/H/28340

Language English

Beeper On


Strength Upper 80

Strength Down 20

Quality Upper 70

Quality Down 10

Antenna 5150
Satellite 76.5E Apstar 7
Transponder 3920/H/28340

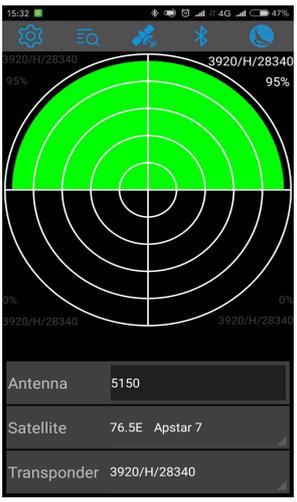

About V8 Finder

V8 Finder Features:


- 1) DVB-S2 Multi standard demodulation.
- 2) Fast channel scan for RF frequency and symbol rate acquisition.
- 3) Support 1 to 60M baud symbol rates.
- 4) IQ imbalance compensator.

Support: www.freemat.cn
ChipId: Za37367f00003c80
SN: FD8131800016
BTID: M11
SW: 2018723_164_20180723

Close Update

Satellite 76.5E Apstar 7
Transponder 3920/H/28340

V8 FINDER BT03 Usage Diagram

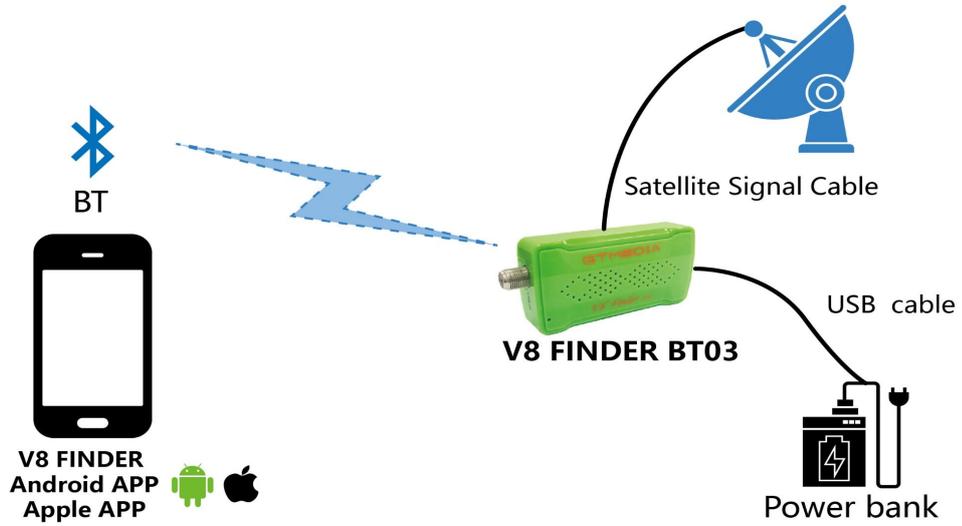

Download "V8 FINDER" APP