

Date	
Project	
Type	
Location	


# LUMI35

## 3.5" LED RECESSED DOWNLIGHT


Recessed Downlight | Interior and Exterior | Dry, Damp, and Wet Location




### CUT HOLE SIZE



### FINISH



### COLOR TEMPERATURE



### BEAM ANGLE



### ORDERING INFORMATION


Sample Number: LUMI35-14W-5C-1-90-BK

Product #	Wattage	CCT	Beam Angle	CRI	Trim Finish
LUMI35	14W	5CCT	1 38°	90 CRI> 90 97 CRI> 97	BK Matte Black WH Flat White SN Satin Nickel

### SPECIFICATIONS

<b>Environment</b>	Interior and Exterior. Under soffit. Suitable for Dry, Damp, and Wet Locations.
<b>Material</b>	Aluminum Body with Adjustable Gimbal
<b>Trim Finish</b>	Black / White / Satin Nickel
<b>Color Temperature</b>	5CCT Selectable - 2700K-3000K-3500K-4000K-5000K
<b>Beam Angle</b>	38°
<b>Input Voltage</b>	120V, 60Hz
<b>Wattage</b>	14W
<b>Lumen</b>	1400Lm
<b>CRI</b>	90 / 97
<b>Dimming</b>	Yes. Triac/ELV 100%-10% Dimming.
<b>IP Rating</b>	44
<b>Mounting</b>	Recessed Mount
<b>Operating Temperature</b>	-20° to 40° C (-4°F~104°F)
<b>Warranty</b>	5 Years Limited Warranty Estimated 50,000 Hours Useful Life of LED

### DIMENSIONS

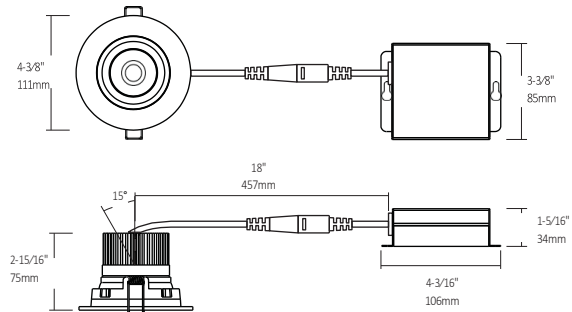

### ACCESSORIES

