

# Li-ion Battery Series

**Long Cycle Life:** provides up to 20 times longer cycle life and 5 times longer float/service life than lead acid, battery help to minimize replacement costs and reduce total cost of ownership.

**Smaller Footprint:** better gravimetric/volumetric specific energy up to 3 times compare with lead acid battery.

**More Available Energy:** deliver twice energy of the lead acid battery, when discharged with heavy load.

**Superior Safety:** build-in BMS——eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation with safe lithium iron phosphate chemistry.

**Fully compatible:** design to replace VRLA battery, compatible with conventional lead acid powered system.

# **Technical Parameters**

Nominal Voltage (V)	12.8
Nominal Capacity (Ah)	32
Total Energy (Wh)	409.6
End Charge Voltage (V)	14.6
Discharge Cut-off Voltage (V)	10
Float Charge Voltage (V)	13.8
Standard Charge/Discharge Current (A)	16 CH / 32 DCH
Max. Charge/Discharge Current (A)	32 CH / 40 DCH
Peak Output Current (A)	40@60s
Lithium Chemistry	LiFePO4
Cycle Life	6000 @ 0.5C 80% DOD
Design Life	20 years
Scalability	2P or 2S

#### Mechinical Specifications لا

Dimension (mm)	W223 * D95 * H175
Weight (kg)	Approx. 3.5
Communication	/
Ingress Rating	IP 65
Safety Standards	UN38.3, CE

Bounergy reserve the final right of explanation.


©BOUNERGY. All rights reserved. Trademarks and logos are the properly of BOUNERGY and its affiliates unless otherwise noted. Subject to revisions without prior notice




# Environmental Specifications لا

Storage Temperature (°C)	-20 ~ 55
Operating Temperature Charge (°C)	0 ~ 55
Operating Temperature Discharge (°C)	-20 ~ 60
Operating Relative Humidity	5 ~ 95%

# Operating Performance لا

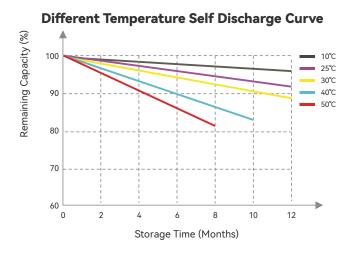

#### Different DOD Discharge Cycle Life Curve (0.5C)

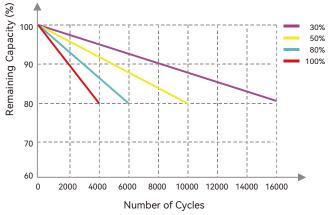

Notes:

Battery should be kept in a dry and ventilated place, avoid direct contact with corrosive substances, also away from sources of fire and heat. Keep the SOC of the battery above 50% if you need to store it for an extended long period. It should be refresh charged every 3 months regularly and SOC should be maintained at about 50% if battery will be stored for a long term.

#### **∠** Applications

