

Date	
Project	
Type	
Location	


LUMI40

4" LED RECESSED DOWNLIGHT


Recessed Downlight | Interior and Exterior | Dry, Damp, and Wet Location




CUT HOLE SIZE



FINISH



COLOR TEMPERATURE



BEAM ANGLE



ORDERING INFORMATION


Sample Number: LUMI40-14W-5C-1-90-BK

Product #	Wattage	CCT	Beam Angle	CRI	Trim Finish
LUMI40	12W	5C	1 38°	90 CRI> 90	BK Matte Black WH Flat White SN Satin Nickel

SPECIFICATIONS

Environment	Interior and Exterior. Under soffit. Suitable for Dry, Damp, and Wet Locations.
Material	Aluminum Body with Adjustable Gimbal
Trim Finish	Black / White / Satin Nickel
Color Temperature	5 CCT Selectable - 2700K-3000K-3500K-4000K-5000K
Beam Angle	38°
Input Voltage	120V, 60Hz
Wattage	12W
Lumen	900Lm
CRI	90
Dimming	Yes. Triac/ELV 100%-10% Dimming.
IP Rating	44
Mounting	Recessed Mount
Operating Temperature	-20° to 40° C (-4°F~104°F)
Warranty	5 Years Limited Warranty Estimated 50,000 Hours Useful Life of LED

DIMENSIONS

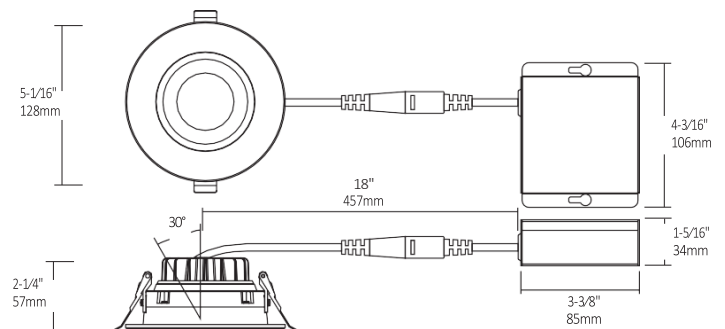

ACCESSORIES

