

Freely Using PC Software/  
Web Cloud/Mobile App




Infrared Live Body Detection

Fast identify forehead, nose, chin, mouth, etc.



Specifications	
Model	TM-AI03F
Hardware	
CPU	1.2G Dual-Core ARM Cortex-A7
NPU	600G (0.6T)
RAM	256M DDR3L
ROM	4G EMMC
Camera	2MP HD Color Camera, 2MP HD Infrared Camera, Wide Range Dynamic
Fill Light	LED Fill Light and Dual Infrared Fill Light
Display	5 inch HD IPS Touch Screen, Resolution 1280*720
Communication port	TCP/IP, USB-Type A(Support U disk), Wifi
Product Size	155mm*133mm*25.5mm
Power	DC 12V, 1A
Working Temperature	0~45 °C
Working Environment	Under normal light, strong light, dark environment, backlight
Firmware Specs	
OS	Linux
Language	English, Spanish, Arabic, Thai, Russian, Portuguese, French, Farsi, Vietnamese, Japanese, Turkish,and customizable
Verify Method	Face Recognition, ID Card(IC optional), Password, or combination
QR Code Scanner	Support
Face/Card/Password	5000(50000 optional)
Fingerprint Capacity	10000(100000 Optional)
Capacity	
Logs Capacity	500,000
Face Recognition Speed	<0.2S
Face Recognition Distance	0.5~2.5 meters(adjustable)
Live Face Detection	Reject Photo and Video
Special Features	At most 5 people face recognition at same time Happy birthday display and audio Mask detection and face recognition with wearing mask
Access Control Interface	
Relay output	One set
Wiegand	One set WG 26/34 Output
Exit button	Support
Door Bell	Support

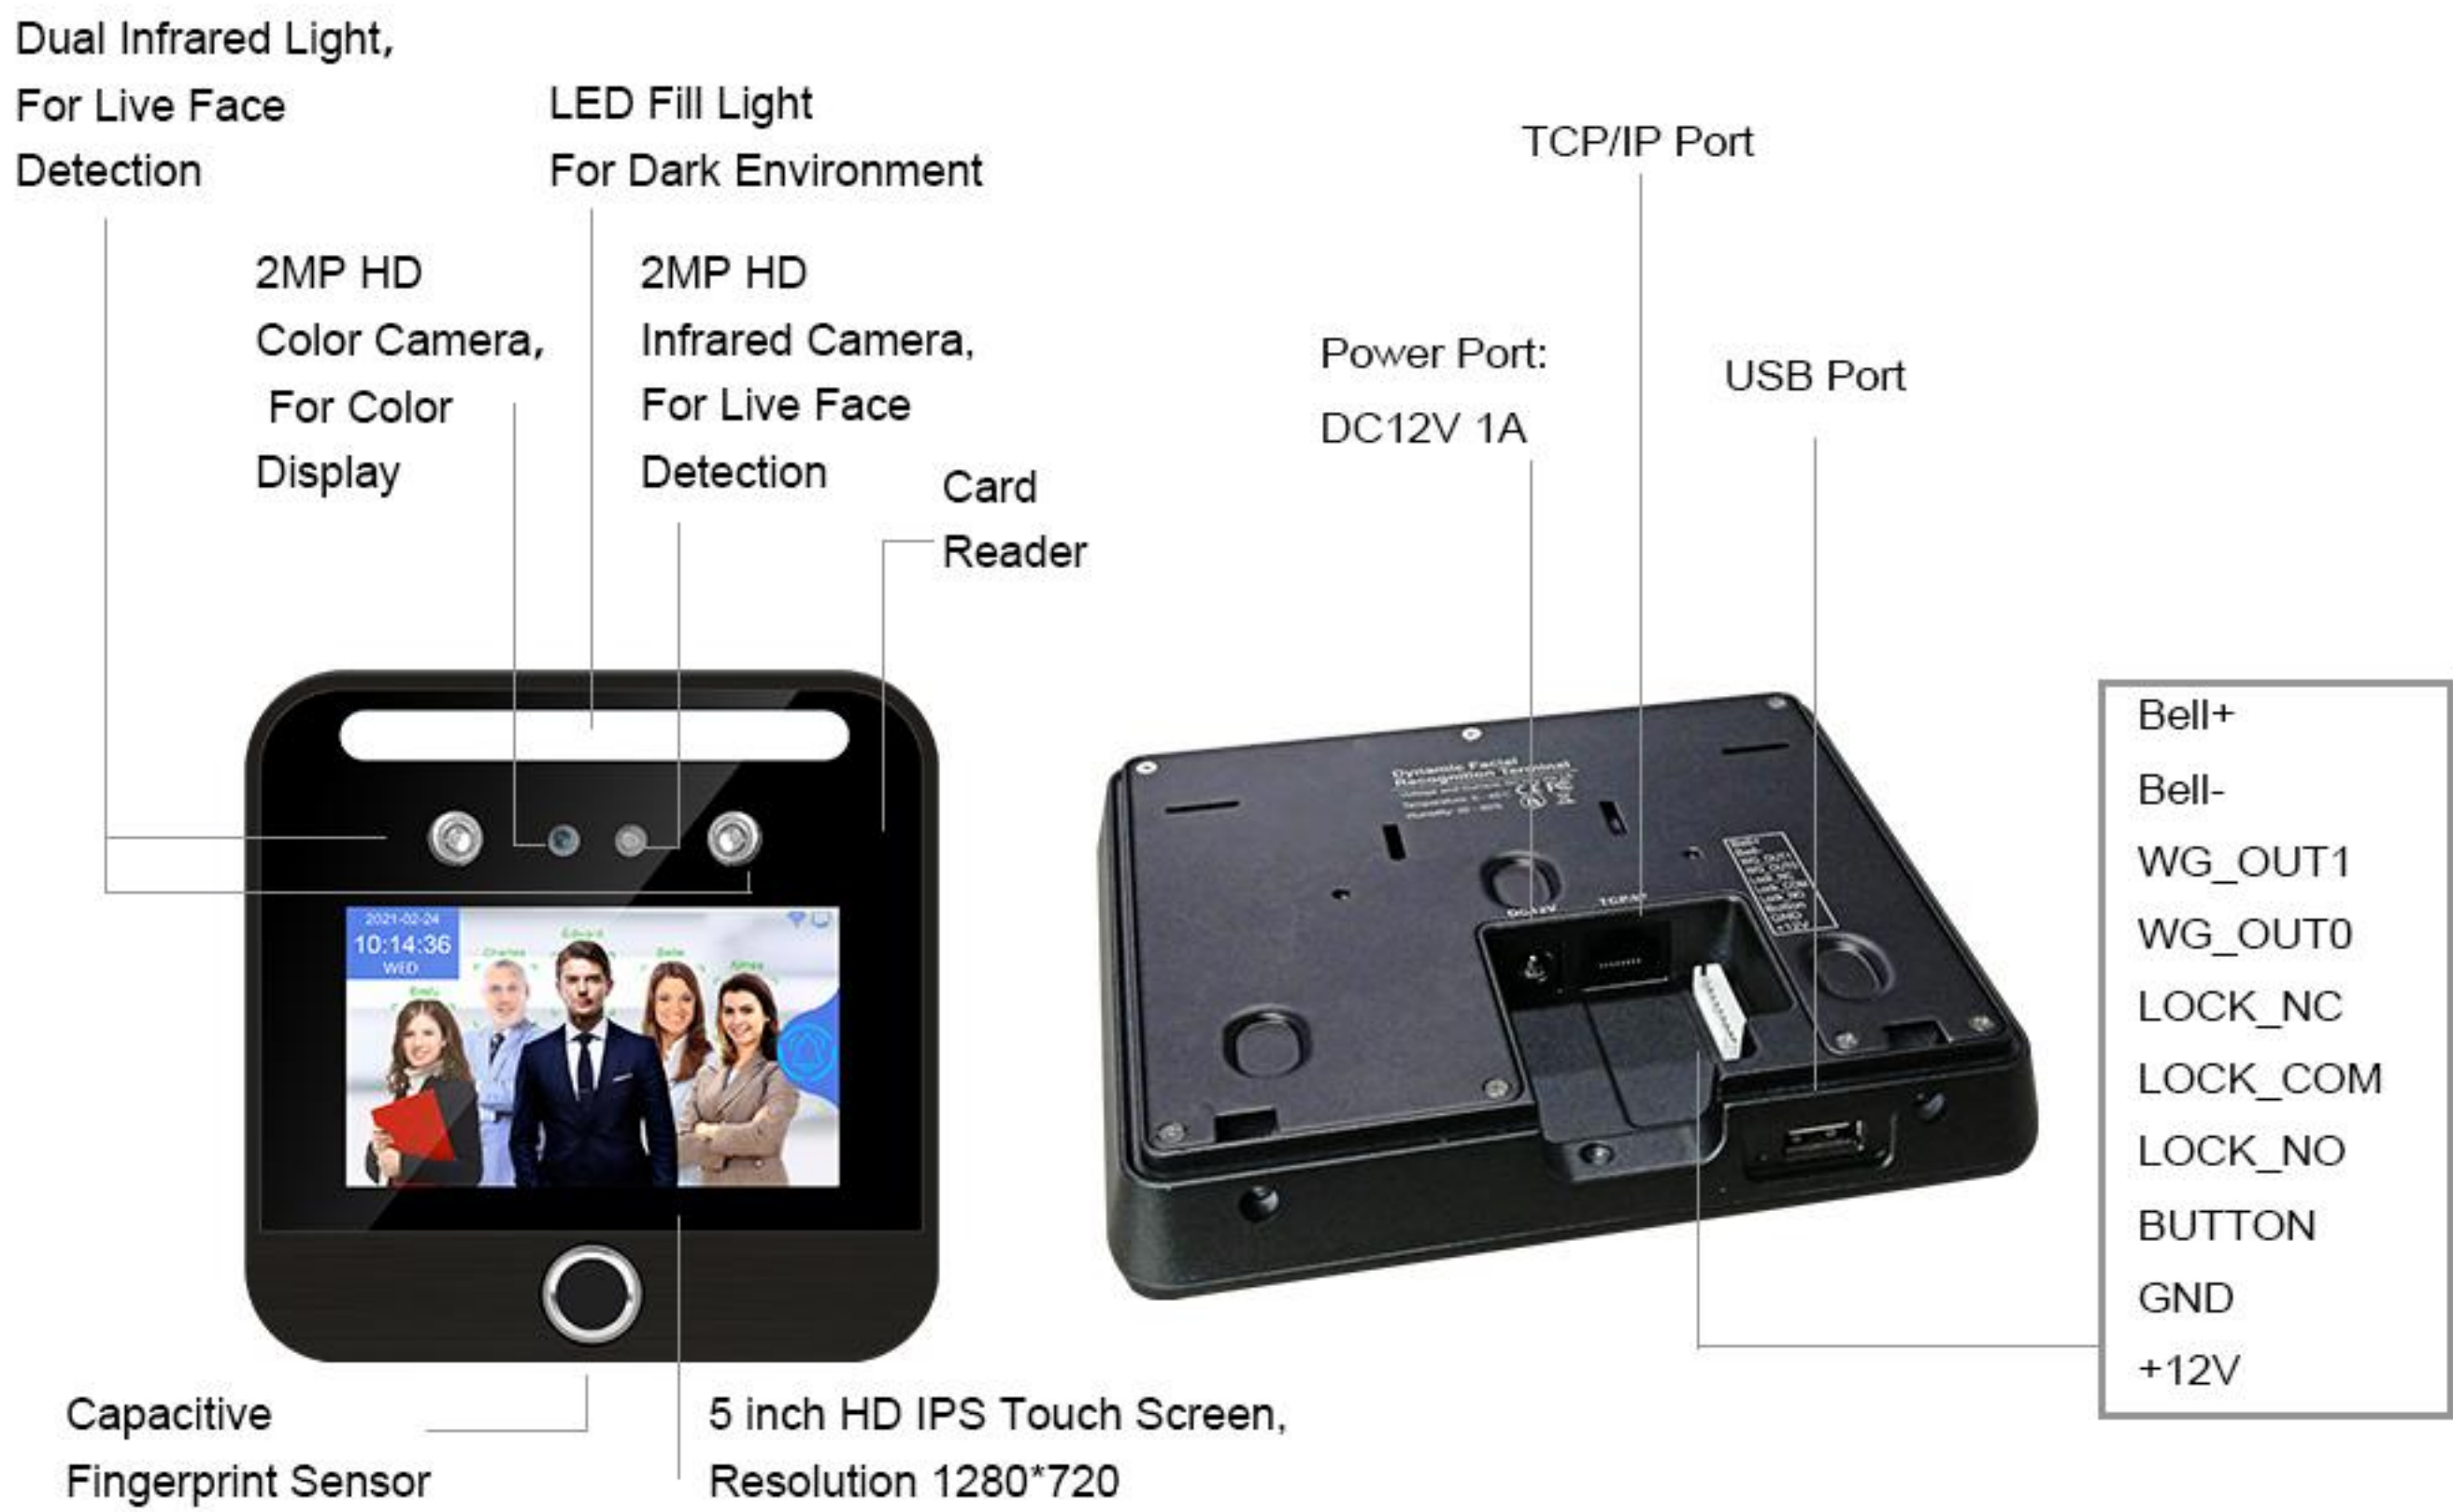

- ◆ Single package size: L218MM\*W210MM\*H110MM
- ◆ Gross Weight including package: around 1kg
- ◆ Carton box Dimension: 575\*435\*235MM, can hold 10pcs devices



Real face recognition

Photo & Video not recognized

### 5 People Face Recognition At Same Time

### Flexible Face Recognition Distance 0.5~2.5 meters

### Verification Logs transfer to software in real-time