



[L1214]

Long Cycle Life: provides up to 20 times longer cycle life and 5 times longer float/service life than lead acid, battery help to minimize replacement costs and reduce total cost of ownership.

Smaller Footprint: better gravimetric/volumetric specific energy up to 3 times compare with lead acid battery.

More Available Energy: deliver twice energy of the lead acid battery, when discharged with heavy load.

Superior Safety: build-in BMS——eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation with safe lithium iron phosphate chemistry.

Fully compatible: design to replace VRLA battery, compatible with conventional lead acid powered system.

⊻ Technical Parameters

Nominal Voltage (V)	12.8
Nominal Capacity (Ah)	14
Total Energy (Wh)	179.2
End Charge Voltage (V)	14.6
Discharge Cut-off Voltage (V)	10
Float Charge Voltage (V)	13.8
Standard Charge/Discharge Current (A)	7 CH / 14 DCH
Max. Charge/Discharge Current (A)	14 CH / 20 DCH
Peak Output Current (A)	20@60s
Lithium Chemistry	LiFePO ₄
Cycle Life	6000 @ 0.5C 80% DOD
Design Life	20 years
Scalability	2P or 2S

Mechinical Specifications لا


Dimension (mm)	W151 * D99 * H99
Weight (kg)	Approx. 1.4
Communication	
Ingress Rating	IP 65
Safety Standards	UN38.3, CE




צ Environmental Specifications

Storage Temperature (°C)	-20 ~ 55
Operating Temperature Charge (°C)	0 ~ 55
Operating Temperature Discharge (°C)	-20 ~ 60
Operating Relative Humidity	5 ~ 95%

☑ Operating Performance

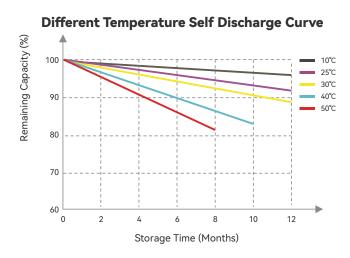

Different DOD Discharge Cycle Life Curve (0.5C)

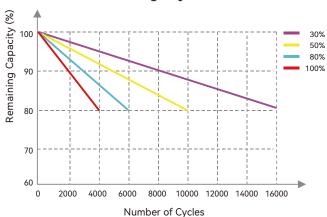

Notes:

Battery should be kept in a dry and ventilated place, avoid direct contact with corrosive substances, also away from sources of fire and heat. Keep the SOC of the battery above 50% if you need to store it for an extended long period. It should be refresh charged every 3 months regularly and SOC should be maintained at about 50% if battery will be stored for a long term.

△ Applications

