

Electronic Speed Controller(ESC)


BL-S 60A 6S 4in

释放电流，驾驭动力

Unleash The Current, Master The Power

产品规格书 **V1.0**

Product Specification

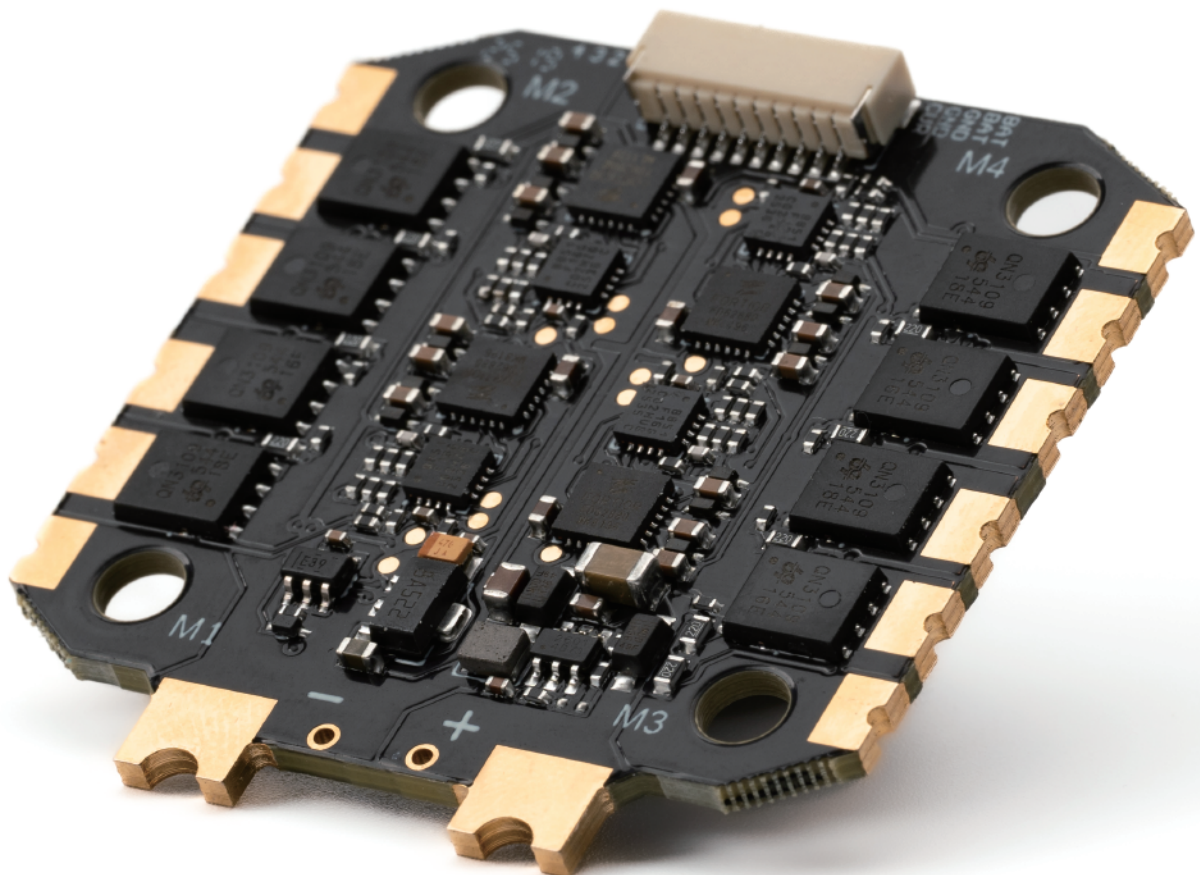


MAD
COMPONENTS

BL-S 60A 6S 4in ESC

MCU / MCU	EFM8BB21/BB51	MOSFET / MOSFET	高性能/High Performance MOSFET
输入 / Input	3~6S Lipo	持续电流 / Continuous Curent	60A*4
安装规格 / Mounting	30.5*30.5mm(4mm 孔径 / Hole Diameter)	电调遥测功能 / ESC Telemetry	不支持 / NO
峰值电流 / Burst Current	70A(10seconds)	协议 / ESC Protocol	DSHOT 300/600
尺寸 / Size	44.5*43*6.3mm	电流传感器量程 / Continuous Sensor Scale	200
固件 / Firmware	BLHeliSuite	重量 / Weight	13.5g


连接示意图 / Wiring Connection Diagram


BL S 60A 6S 4in

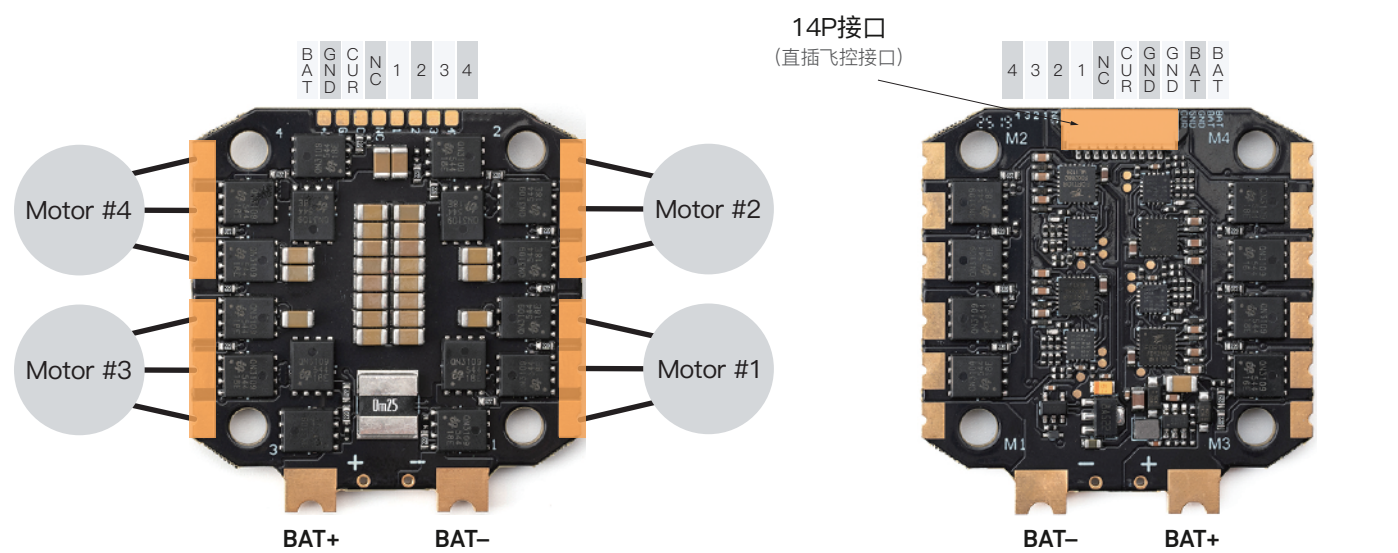

外观尺寸 / External Dimensions

BL S 60A 6S 4in

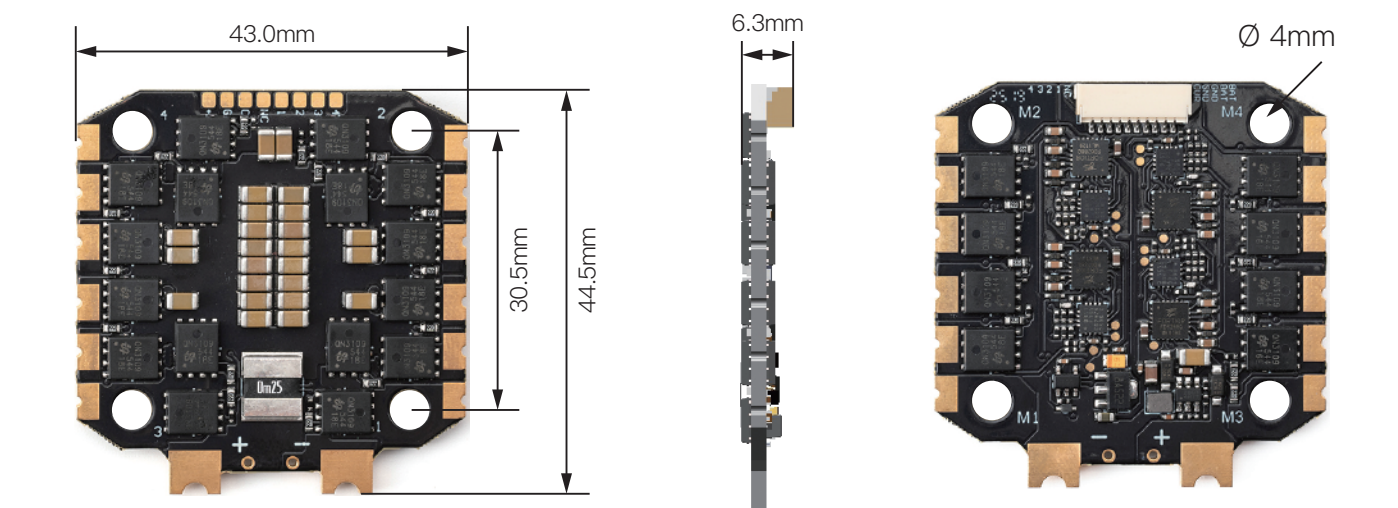

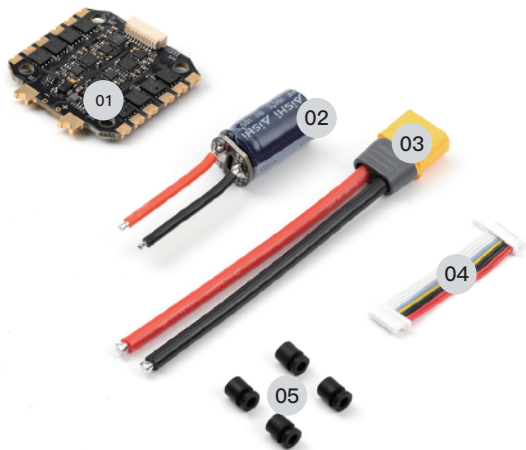

- 01 60A 6S 4in 电调 / ESC / 1PC
- 02 电源线 / Power Wire (XT60头/Connector, 长度 / Cable Length 110mm) / 1PC
- 03 电容 / Capacitor (35v2000uf) / 1PC
- 04 电调排线 / ESC Ribbon Cable (SH1.0 10P转14P / SH1.0 10P to 14P Cable) / 1PC
- 05 减震球 / Anti-Vibration Ball (3*8mm) / 4PC

内容如有更新 恕不另行通知
您可在MAD官方网站查询最新版本
Content may be updated without prior notice
You can check the latest version on the MAD official website

如果您对产品规格书有任何疑问或建议，请通过以下
电子邮箱联系我们：hulei@madmotor.cn
为飞行创造无限动力·迈得机电 版权所有

If you have any questions or suggestions regarding
the product specifications, please contact us via the
following email address: support@mad-motor.com
Creating infinite power for flight · MAD COMONENTS. All rights reserved



官方二维码（中文）
Official QR Code (Chinese)



官方二维码（英文）
Official QR Code (English)

<https://www.madmotor.cn>
<https://www.mad-motor.com>